


Features:

- AC INPUT: 100–240V~ 50/60Hz, 1.8A MAX
- DC OUTPUT: 19.5V 4.62A MAX
- With input fuse protection
- Full Protection Designs (OVP, OTP, OCP, SCP)
- Size(L*W*H): 133x58x33mm
- Unit Weight: 280g
- EU AC cable: 1.2M length
- DC cable: 1.0M length



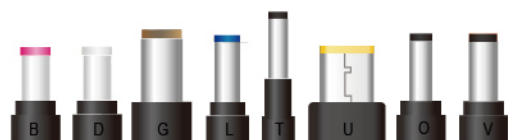
• High Efficiency

The efficiency (watts out / watts in) shall be higher than 88% minimum while measuring at nominal line and maximum load.











• Highly Compatible to Notebook

Highly Compatible to Notebook of HP, Compaq, Asus, Toshiba, IBM, Dell (PA16), Lenovo, LG, Clevo, Fujitsu, Gateway, Advent, Benq, PackardBell, MSI, Medion....



Compatible to Notebook

Plug NO.	DC plug size (OD*ID)	Compatible Brands
	5.5*1.7mm	Acer, PackardBell, eMachines, Gateway
	5.5*3.0mm	SamsungLaptops & minilaptops
	8.0*5.5mm	Lenovo, IBM
	5.5*2.5mm	HP, Compaq, Asus, Toshiba, IBM, Dell(PA16), Lenovo, LG, Clevo, Fujitsu, Gateway, Advent, PackardBell, MSI, Benq, Medion...
	4.8*1.7mm	HP, COMPAQ, Gateway, LG, eMachines, ASUS
	Квадратный	Lenovo
	5.5*2.1mm	Gateway, Hitachi, Lenovo, Nec, Sharp, Twinhead
	6.5*3.0mm	ASUS

