



全漢企業股份有限公司
FSP TECHNOLOGY INC.

台灣桃園市建國東路22號 統一編號：84239055
No. 22, Jianguo East Road., Taoyuan City, Taiwan, R.O.C.
TEL:+886-3-375-9888 Website : www.FSP-group.com
FAX:+886-3-375-6966 Email : sales@fsp-group.com.tw






MECHANICAL DRAWING



OAD06070983

FSP400-601UG


Released Date:2008/4/17-11:44:58

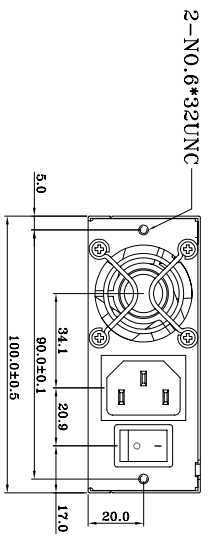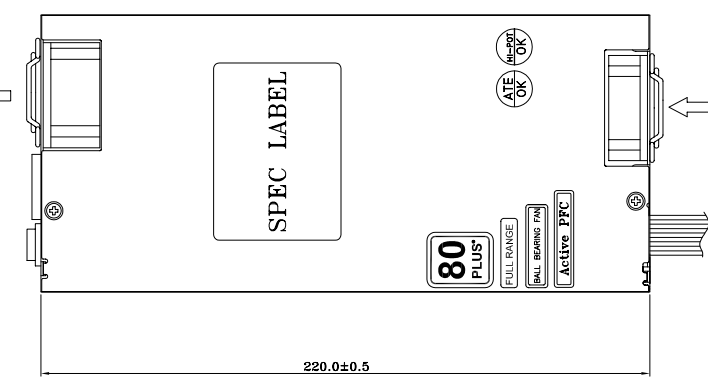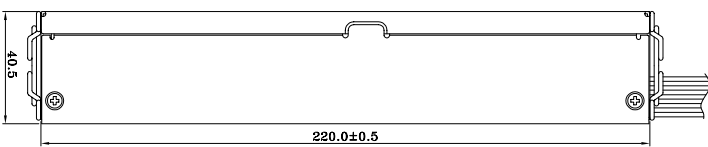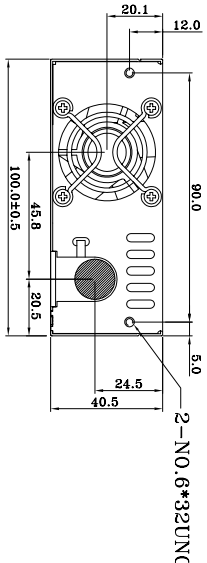

AIR FLOW

AIR FLOW

UNIT:mm

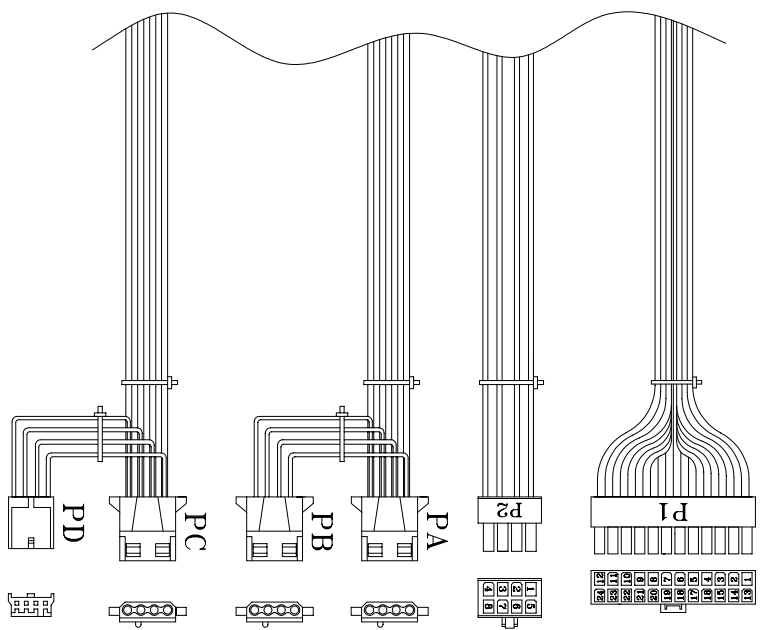

取消W/NOISE KILLER LABEL
& 增加80 PLUS LABEL

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 產地標籤依業務指示加貼.

| REF. ID. | PIN NO. | SIGNAL | WIRE COLOR | GAUGE | CONNECTOR TYPE | CABLE LENGTH |
|----------|---------|-----------|--------------|-------|-----------------------------------|--------------|
| P1 | 1 | +3.3VDC | ORANGE | 18 | MOLEX 39-01-2240 or EQUIV. | 200±15mm |
| | 2 | +3.3VDC | ORANGE | 18 | | |
| | 3 | COM | BLACK | 18 | | |
| | 4 | +5VDC | RED | 18 | | |
| | 5 | COM | BLACK | 18 | | |
| | 6 | +5VDC | RED | 18 | | |
| | 7 | COM | BLACK | 18 | | |
| | 8 | PW-OK | GRAY | 18 | | |
| | 9 | +5Vsb | PURPLE | 18 | | |
| | 10 | +12V2 | YELLOW | 18 | | |
| | 11 | +12V2 | YELLOW | 18 | | |
| | 12 | +3.3VDC | ORANGE | 18 | | |
| | 13 | +3.3VDC | ORANGE | 18 | | |
| | 14 | +3V sense | BROWN | 22 | | |
| | 15 | -12VDC | BLUE | 18 | | |
| | 16 | PS-ON | GREEN | 18 | | |
| | 17 | COM | BLACK | 18 | | |
| | 18 | COM | BLACK | 18 | | |
| | 19 | COM | BLACK | 18 | | |
| | 20 | COM | BLACK | 18 | | |
| | 21 | +5VDC | RED | 18 | | |
| | 22 | +5VDC | RED | 18 | | |
| | 23 | +5VDC | RED | 18 | | |
| | 24 | COM | BLACK | 18 | | |
| P2 | 1 | COM | BLACK | 18 | MOLEX 39-01-2080 or EQUIV. | 200±15mm |
| | 2 | COM | BLACK | 18 | | |
| | 3 | COM | BLACK | 18 | | |
| | 4 | COM | BLACK | 18 | | |
| PA | 1 | +12V1 | YELLOW/BLACK | 18 | AMP 1-480424-0 200±15mm or EQUIV. | 200±15mm |
| | 2 | +12V2 | YELLOW/BLACK | 18 | | |
| | 3 | COM | BLACK | 18 | | |
| | 4 | +5V | RED | 18 | | |
| PB | 1 | +12V2 | YELLOW | 18 | AMP 1-480424-0 150±10mm or EQUIV. | 150±10mm |
| | 2 | COM | BLACK | 18 | | |
| | 3 | COM | BLACK | 18 | | |
| | 4 | +5V | RED | 18 | | |
| PC | 1 | +12V2 | YELLOW | 18 | AMP 1-480424-0 200±15mm or EQUIV. | 200±15mm |
| | 2 | COM | BLACK | 18 | | |
| | 3 | COM | BLACK | 18 | | |
| | 4 | +5V | RED | 18 | | |
| PD | 1 | +12V2 | YELLOW | 22 | AMP 171822-4 150±10mm or EQUIV. | 150±10mm |
| | 2 | COM | BLACK | 22 | | |
| | 3 | COM | BLACK | 22 | | |
| | 4 | +5V | RED | 22 | | |

P/N.:9PA4004300

| | | | | | | | |
|-------------|--------------|--------|-------|--------|-------------|------|----|
| MODEL NO. : | FSP400-601UG | TITLE: | ASSY | SHEET: | 1 OF 1 | REV: | 03 |
| | R&D (2) | | PE | | | | |
| | | | DRAWN | | | | |
| | | | 黃鈺婷 | | | | |
| | | | | DATE | | | |
| | | | | | APR.16.2008 | | |

Mechanical Drawing(外觀/機體圖)表單編號:000P-0111